



INSTALLATION INSTRUCTIONS: HHT ROOF RACK

1. Verify equipment provided by manufacturer:
 - a. Roof rack
 - b. 6 x rubber foot pads
 - c. 4 x turnbuckle kits
 - d. 6 x metal feet
 - e. 12 x 5/16" x 2" stainless steel bolts w/ washers and nylock nuts
2. The following tools are necessary for installation:
 - a. 1/2" crescent wrench
3. Attach rubber foot pads to the roof rack; ensuring the rubber flap faces the inboard side of the feet.
4. Attach metal feet to the roof rack, using 2 of the 5/16" x 2" bolts with washers and nylock nuts. The feet should angle outward. Do not fully tighten down until after the rack is set in place and the feet are adjusted to fit in the rain gutters

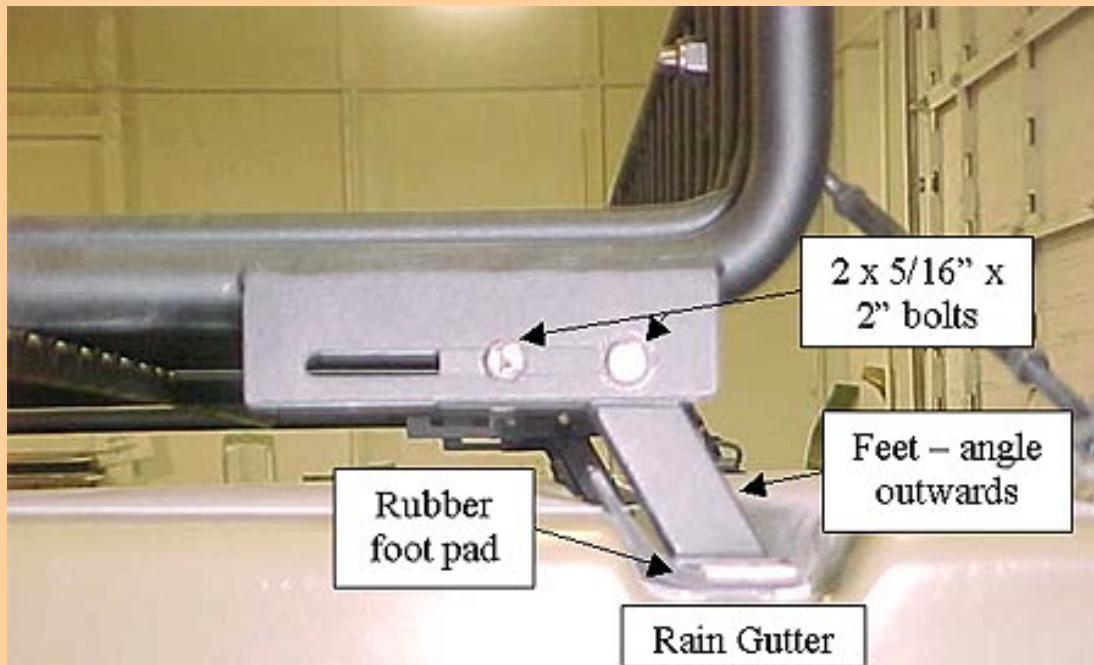

5. Place roof rack on top of the Helmet HardTop®. The middle two feet should be closer to the front of the vehicle than to the rear.

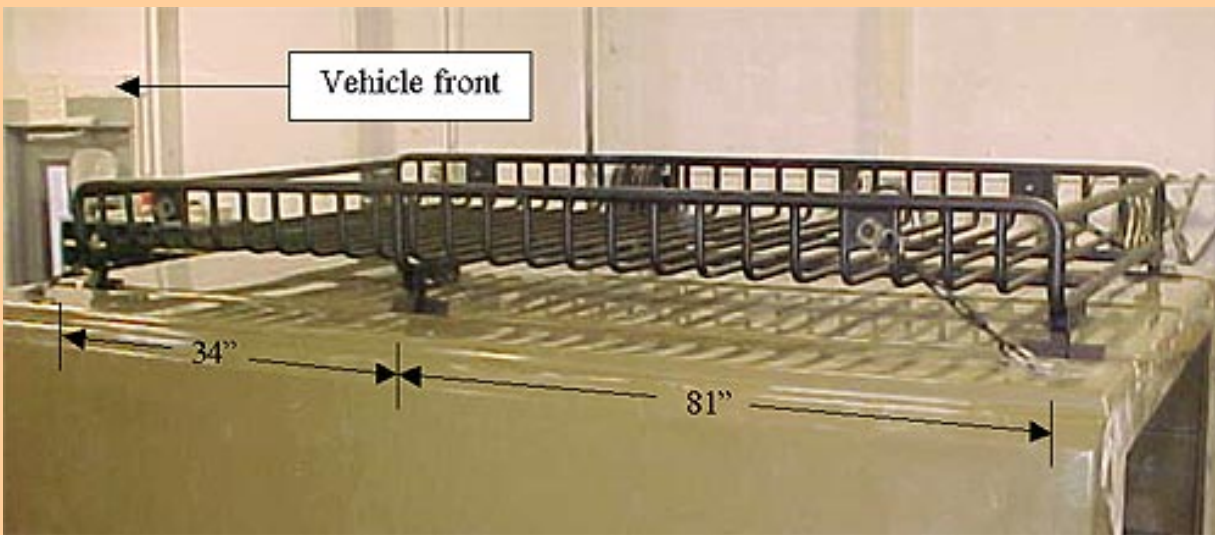

6. Adjust the feet so that they are centered in the rain gutters. Tighten down the bolts attaching the feet to the roof rack.

7. Attach roof rack to the top using the four turnbuckles. Run the turnbuckles from the D-Rings on the side of the rack to the D-rings on the top of the Helmet HardTop®. Rotate the center of the turnbuckle until the rack is secure at all four points. Secure the turnbuckle in place by tightening the locking nuts to the center of the turnbuckle.